



Dallas 75229 - 1501, 11403 Mathis Dallas,
Texas 75234 United States of America.
Tel : +1 215 657 3335
Fax : +1 215 784 0343


- 100% high tenacity polyester of out sleeve and inner core
- With two ply woven heavy duty out sleeve
- Low elongation
- Each stripe is equal to 1 ton capacity
- Length available: 1m to 10m
- Safety factor available: 7:1 & 8:1
- According to EN 1492-2:2000



Copyright 2020 Ableforge Mfg Inc.
All Rights reserved

Model: ASR07

ABLE ROUND SLING

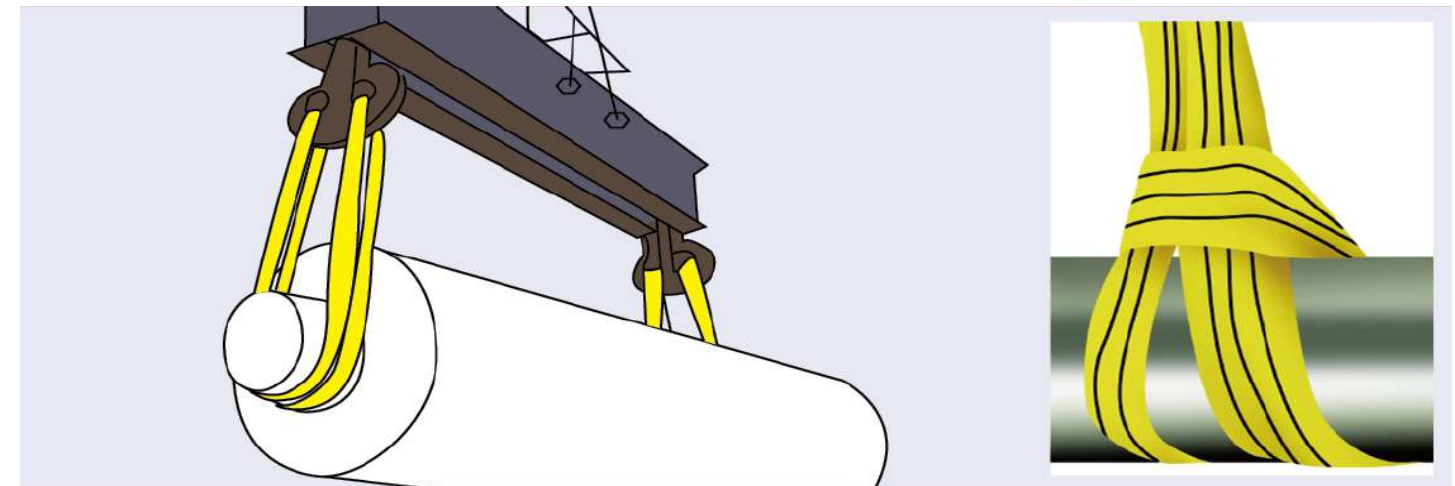

Colour	Colour coded according to EN 1492-1	Working Load Limit with 1 Round sling							Working Load Limit with 2 Round sling			
		Straight lift	Choked lift	β				Straight lift up to 45°	Choked lift up to 45°	Straight lift up to 45°-60°	Choked lift up to 45°-60°	
				0°-7°	7°-45°	45°-60°	up to 45°					45°-60°
		1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
Purple	WLL1T	1.0	0.8	2.0	1.4	1.0	0.7	0.5	1.4	1.12	1.0	0.8
Green	WLL2T	2.0	1.6	4.0	2.8	2.0	1.4	1.0	2.8	2.24	2.0	1.6
Yellow	WLL3T	3.0	2.4	6.0	4.2	3.0	2.1	1.5	4.2	3.36	3.0	2.4
Grey	WLL4T	4.0	3.2	8.0	5.6	4.0	2.8	2.0	5.6	4.48	4.0	3.2
Red	WLL5T	5.0	4.0	10.0	7.0	5.0	3.5	2.5	7.0	5.6	5.0	4.0
Brown	WLL6T	6.0	4.8	12.0	8.4	6.0	4.2	3.0	8.4	6.72	6.0	4.8
Blue	WLL8T	8.0	6.4	16.0	11.2	8.0	5.8	4.0	11.2	8.96	8.0	6.4
Orange	WLL10T	10.0	8.0	20.0	14.0	10.0	7.0	5.0	14.0	11.2	10.0	8.0

Notes: Bigger size up to 100T (20/30/50/100T) is available from our production upon demand.

ABLE PRODUCTS W.L.L. 3000Kg
 Manufactured to Comply with all Relevant Requirements of Standards EN1492-2:2000
 S/N: ASR3F1500 Safety Factor: 7 to 1
Round Sling

ABLE PRODUCTS
 Vertical Choke Hook U Δ

There is no guess work in safe lifting
 1. Load by hook for safe configuration and use in lift
 2. Do not drag the load over the sling
 3. Do not use the sling for other purposes
 4. Do not use the sling for other purposes
 5. Do not use the sling for other purposes
 6. Do not use the sling for other purposes
 7. Do not use the sling for other purposes
 8. Do not use the sling for other purposes
 9. Do not use the sling for other purposes
 10. Do not use the sling for other purposes

Ableforge INDUSTRIES
 Reliability, secured.

Ableforge Manufacturing Inc.
 1501, 11403 Mathis Dallas, Texas 75229
 Tel: +1 215 657 3335 Fax: +1 215 784 0343

CERTIFICATE OF PROOF TESTING

ABLE SAFETY LIFTING APPLICATIONS
 www.ableforge.com

PROOF TEST CERTIFICATE

Round Sling
 Type: ASR-07

This is to certify that the round slings have been manufactured and proof tested not less than two times of WLL, to EN1492-2:2000

Sling Material: 100% High Tenacity Polyester Fiber End Fittings: x
 Serial Number/s: ASR3F1001 to ASR3F1500 Batch Number: LLA1029034
 Working Load Limit: 3000kg Min. Proof Force: 21000kg
 Effective Length: 6 mtrs Quantity: 500 pcs
 Date of Manufacturing: 24 / 05 / 2020 Date of Testing: 29 / 05 / 2020

Tested and Approved for ABLE Products in accordance with Standard EN1492-2:2000
 Ableforge Mfg Inc-USA-ISO9001 Certified Group

TESTING OFFICER Howard Warner



Model: ASR07

ABLE round slings are easy to use, efficient in operation and gentle on surface contact. All round slings are colour coded to give easy identification of the safe working load. They come with a label giving length and tonnage. The round sling inner core is made from high tensile polyester fibre which is wound continuously without a join to provide the maximum possible strength. This core is protected by a tough woven tubular sleeve also made from polyester without side stitch. It serves to protect both the inner core of the sling and the surface of the product when lifting.